


Doosan Heavy Industries & Construction Co.,Ltd.

Integrated solutions for a better life -Nuclear Business




Building your tomorrow today

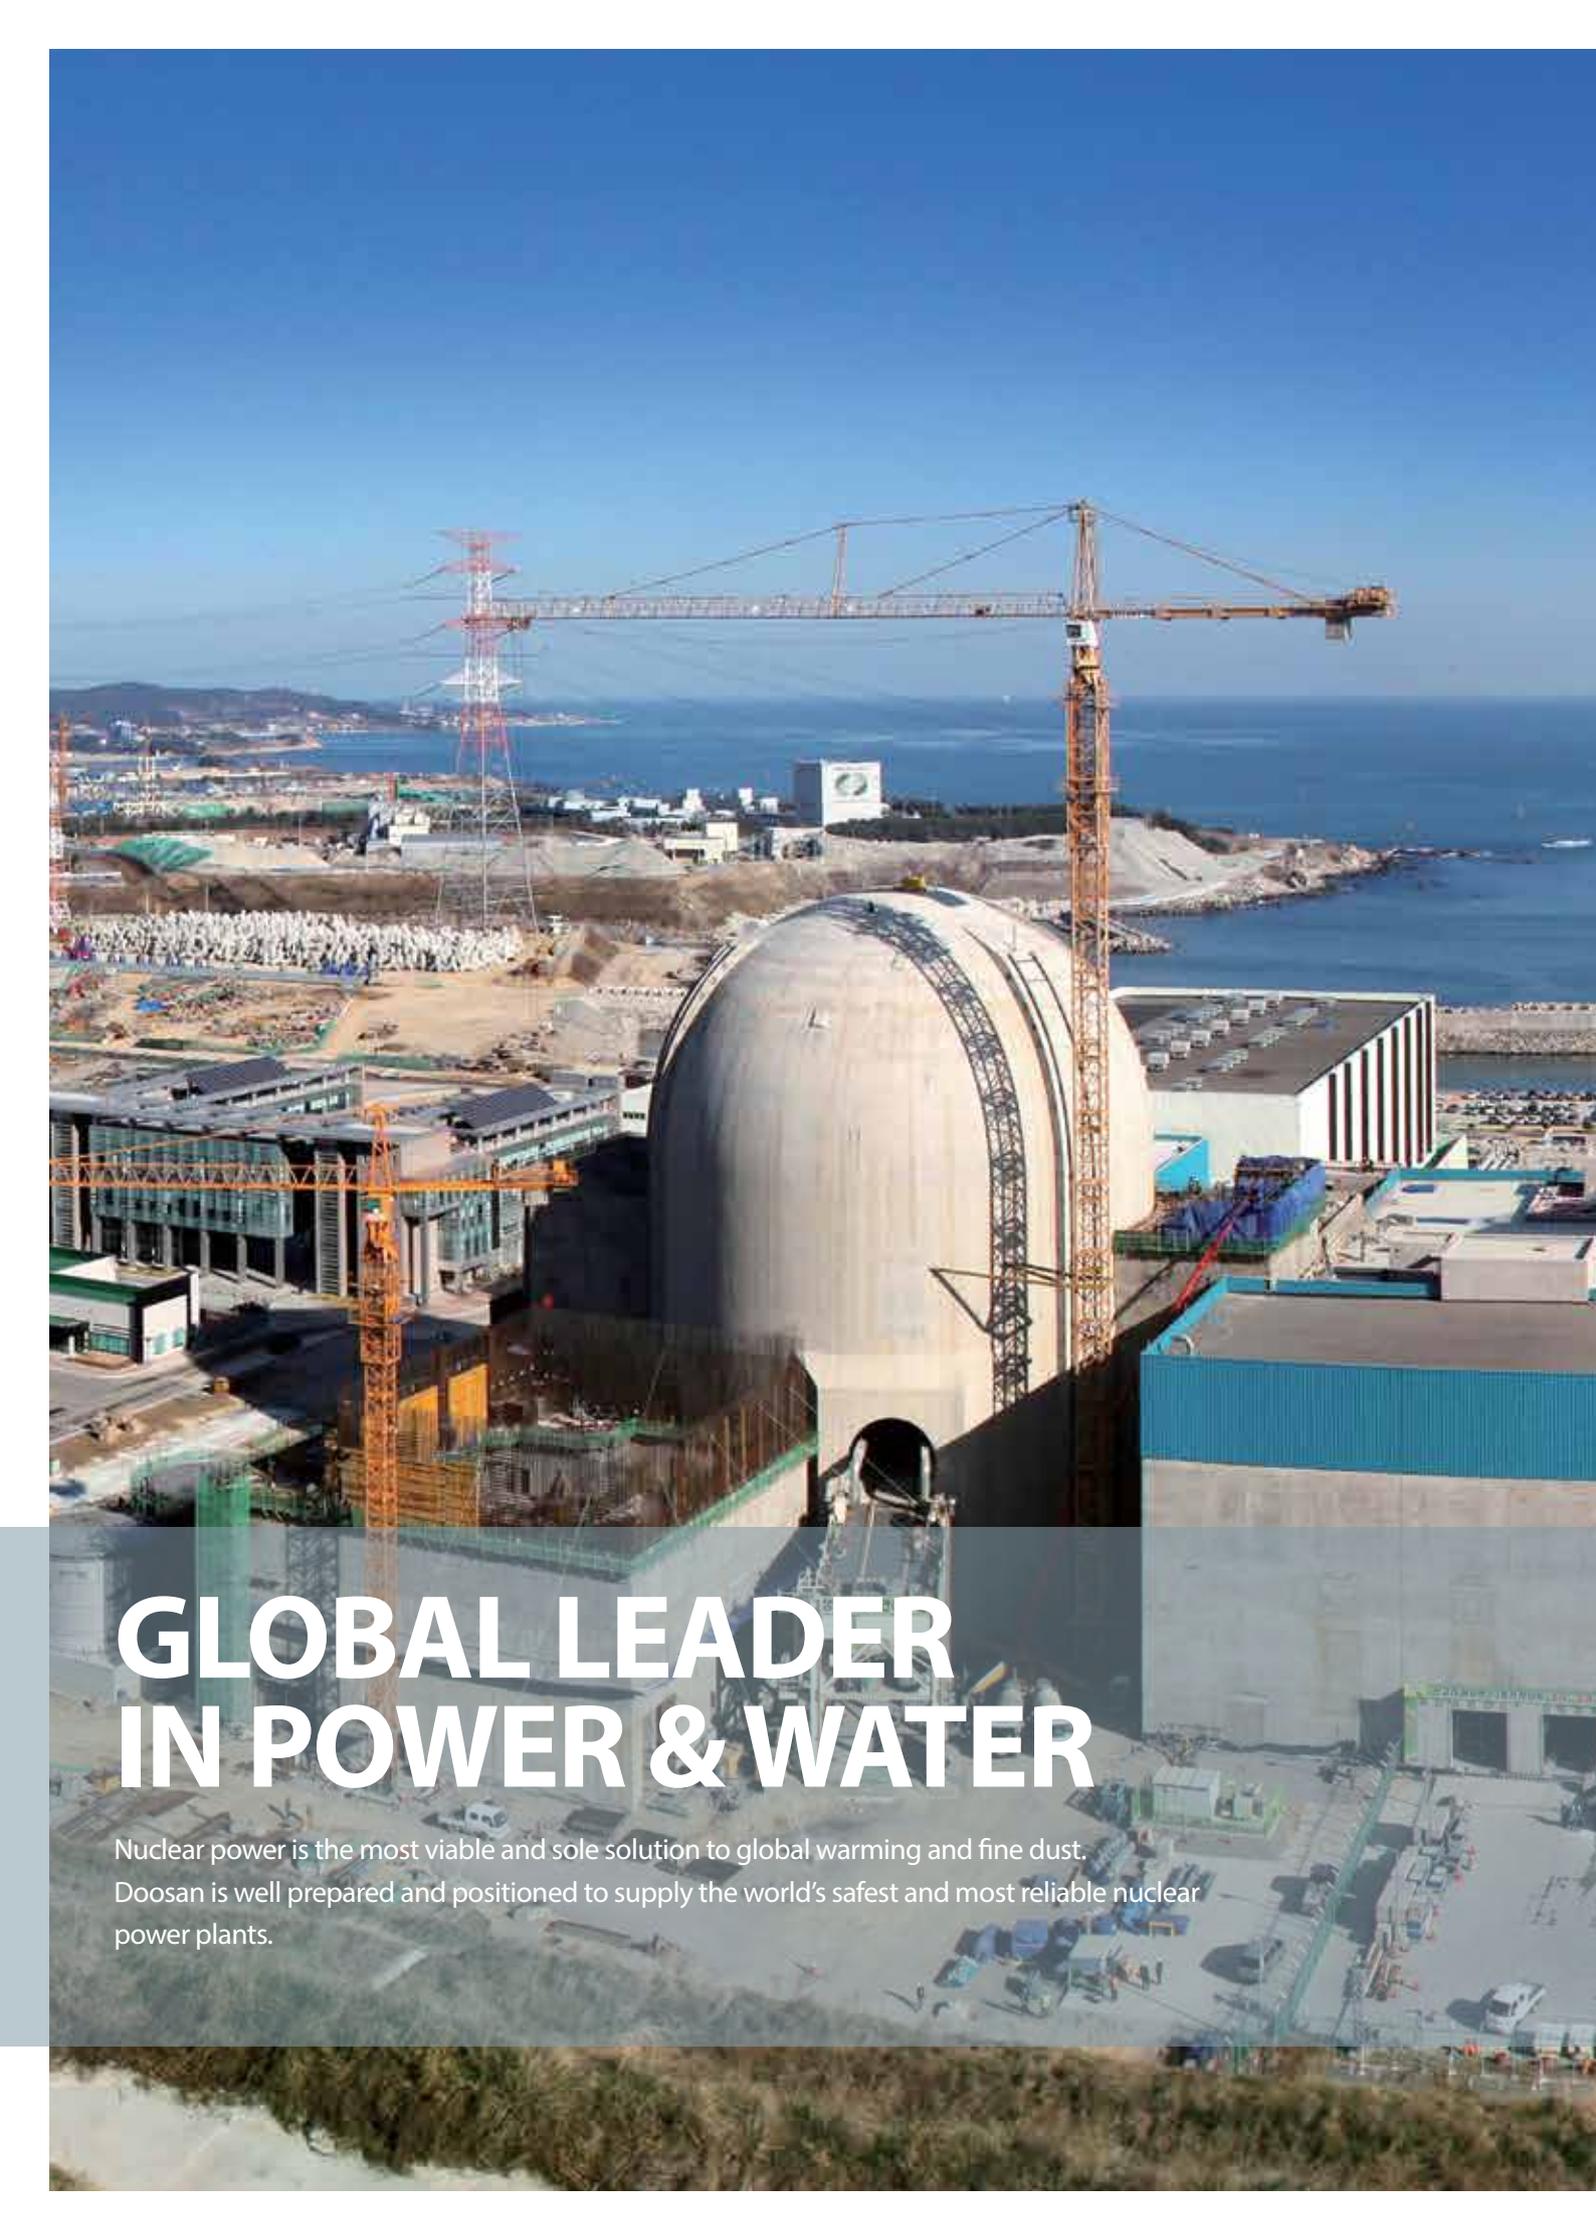

GLOBAL LEADER IN POWER & WATER

Nuclear power is the most viable and sole solution to global warming and fine dust.
Doosan is well prepared and positioned to supply the world's safest and most reliable nuclear power plants.

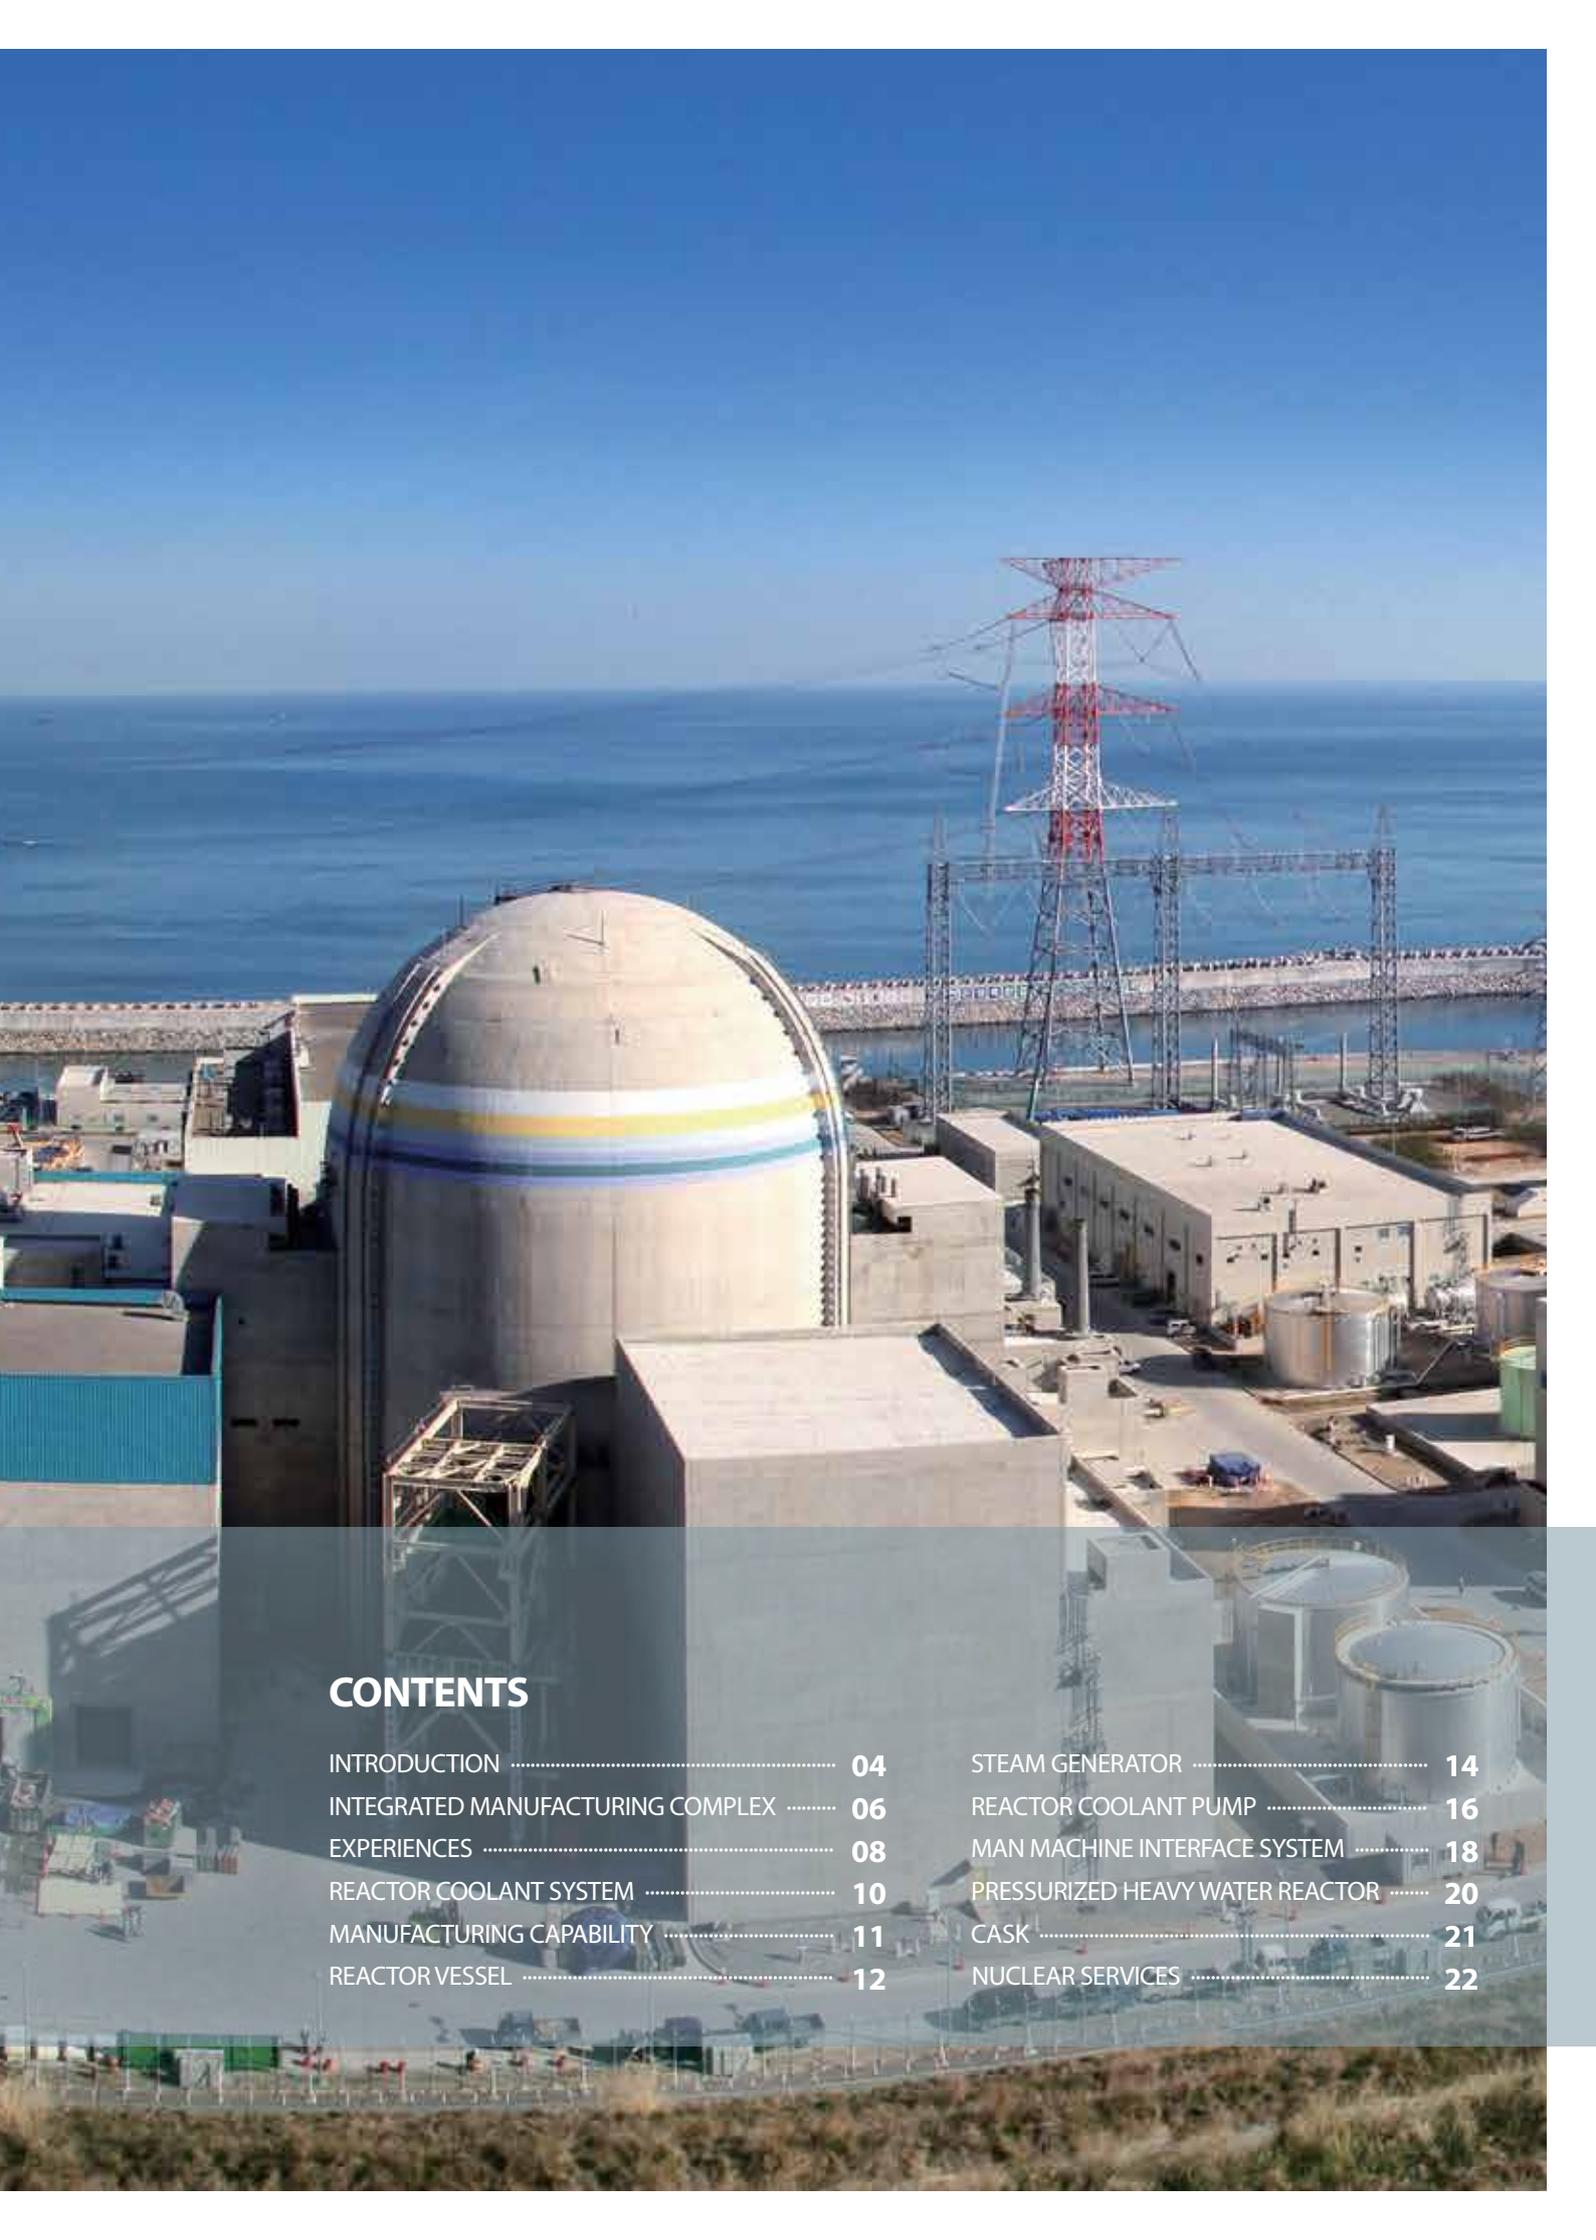


CONTENTS

INTRODUCTION	04	STEAM GENERATOR	14
INTEGRATED MANUFACTURING COMPLEX	06	REACTOR COOLANT PUMP	16
EXPERIENCES	08	MAN MACHINE INTERFACE SYSTEM	18
REACTOR COOLANT SYSTEM	10	PRESSURIZED HEAVY WATER REACTOR	20
MANUFACTURING CAPABILITY	11	CASK	21
REACTOR VESSEL	12	NUCLEAR SERVICES	22

INTRODUCTION

In line with Korea's fast-growing economy, the nation's power demand has surged. As a leading supplier of nuclear equipment, Doosan has taken the responsibility to meet the increasing power demand.



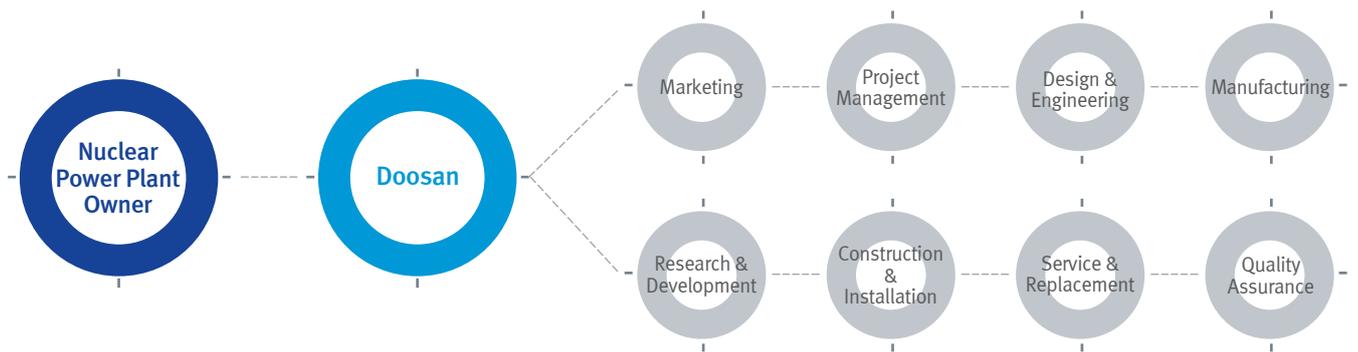

With the groundbreaking of Changwon plant in 1976, Doosan set its foot in the nuclear power business. By 1986, Doosan had supplied power plant system to Hanbit units 1 & 2, which marks 'Technology Implementation Stage' in the company's nuclear business history. During this period, the company adopted new nuclear technologies for the first time in the industry and laid the foundation for nuclear systems including quality assurance system.

In 1987, Doosan was selected as the main contractor of Nuclear Steam Supply System (NSSS) for Hanbit units 3 & 4. The technology transfer and project implementation enabled the company to accumulate ample and competitive experience in the nuclear project. Building on sufficient production facilities in place to develop the main systems, Doosan brought about a significant advancement in the design and production of materials and systems. With implementation of Hanul units 3 & 4 project, Doosan moved on to 'Technology Advancement Stage' for its nuclear power business. Based on the experience from Hanbit units 3 & 4, Doosan went on to design of Hanul units 3 & 4 by itself. In order to reinforce nuclear technology, engineers were dispatched overseas to take training to supplement its production technology.

After successful completion of Hanul units 3 & 4, Doosan achieved its own technological prowess to design and manufacture main nuclear power systems. Along with this, Doosan also signed a steam generator supply contract for China's Qinshan units 1 & 2 (phase III) in 1997. The track record of supplying main nuclear power systems to China and then to the US put the company's technological prowess on the global nuclear map. This marked the beginning of Doosan's technological independence. During Korea's Nu-tech 2012 project, the company proceed to develop RCP and MMIS technology.


As a member of 'Team Korea', a consortium formed by the nation's leading nuclear business entities, Doosan will continue to play a key role in exporting Korean advanced nuclear power system to Europe and Middle East while committed to subsequent nuclear power plants in Korea. Furthermore, most countries wishing to import nuclear power systems believe local contents will serve as their KSF (Key Success Factor) for building more nuclear power plants. Doosan will help these countries develop their own technology, thereby being poised to become an industry leader in the nuclear business.

Doosan Heavy Industries & Construction Co.,Ltd.

INTEGRATED MANUFACTURING COMPLEX : Changwon Plant

At Doosan, we've consistently brought excellence in engineering, procurement, manufacturing, construction and service to clients around the world since 1962. We've helped utilities build over 680 thermal, combined-cycle and nuclear power units representing almost 200GW of installed capacity to date in over 30 countries. And along the way, our technical innovations and commitment to total client satisfaction have made us a global leader in power and water.



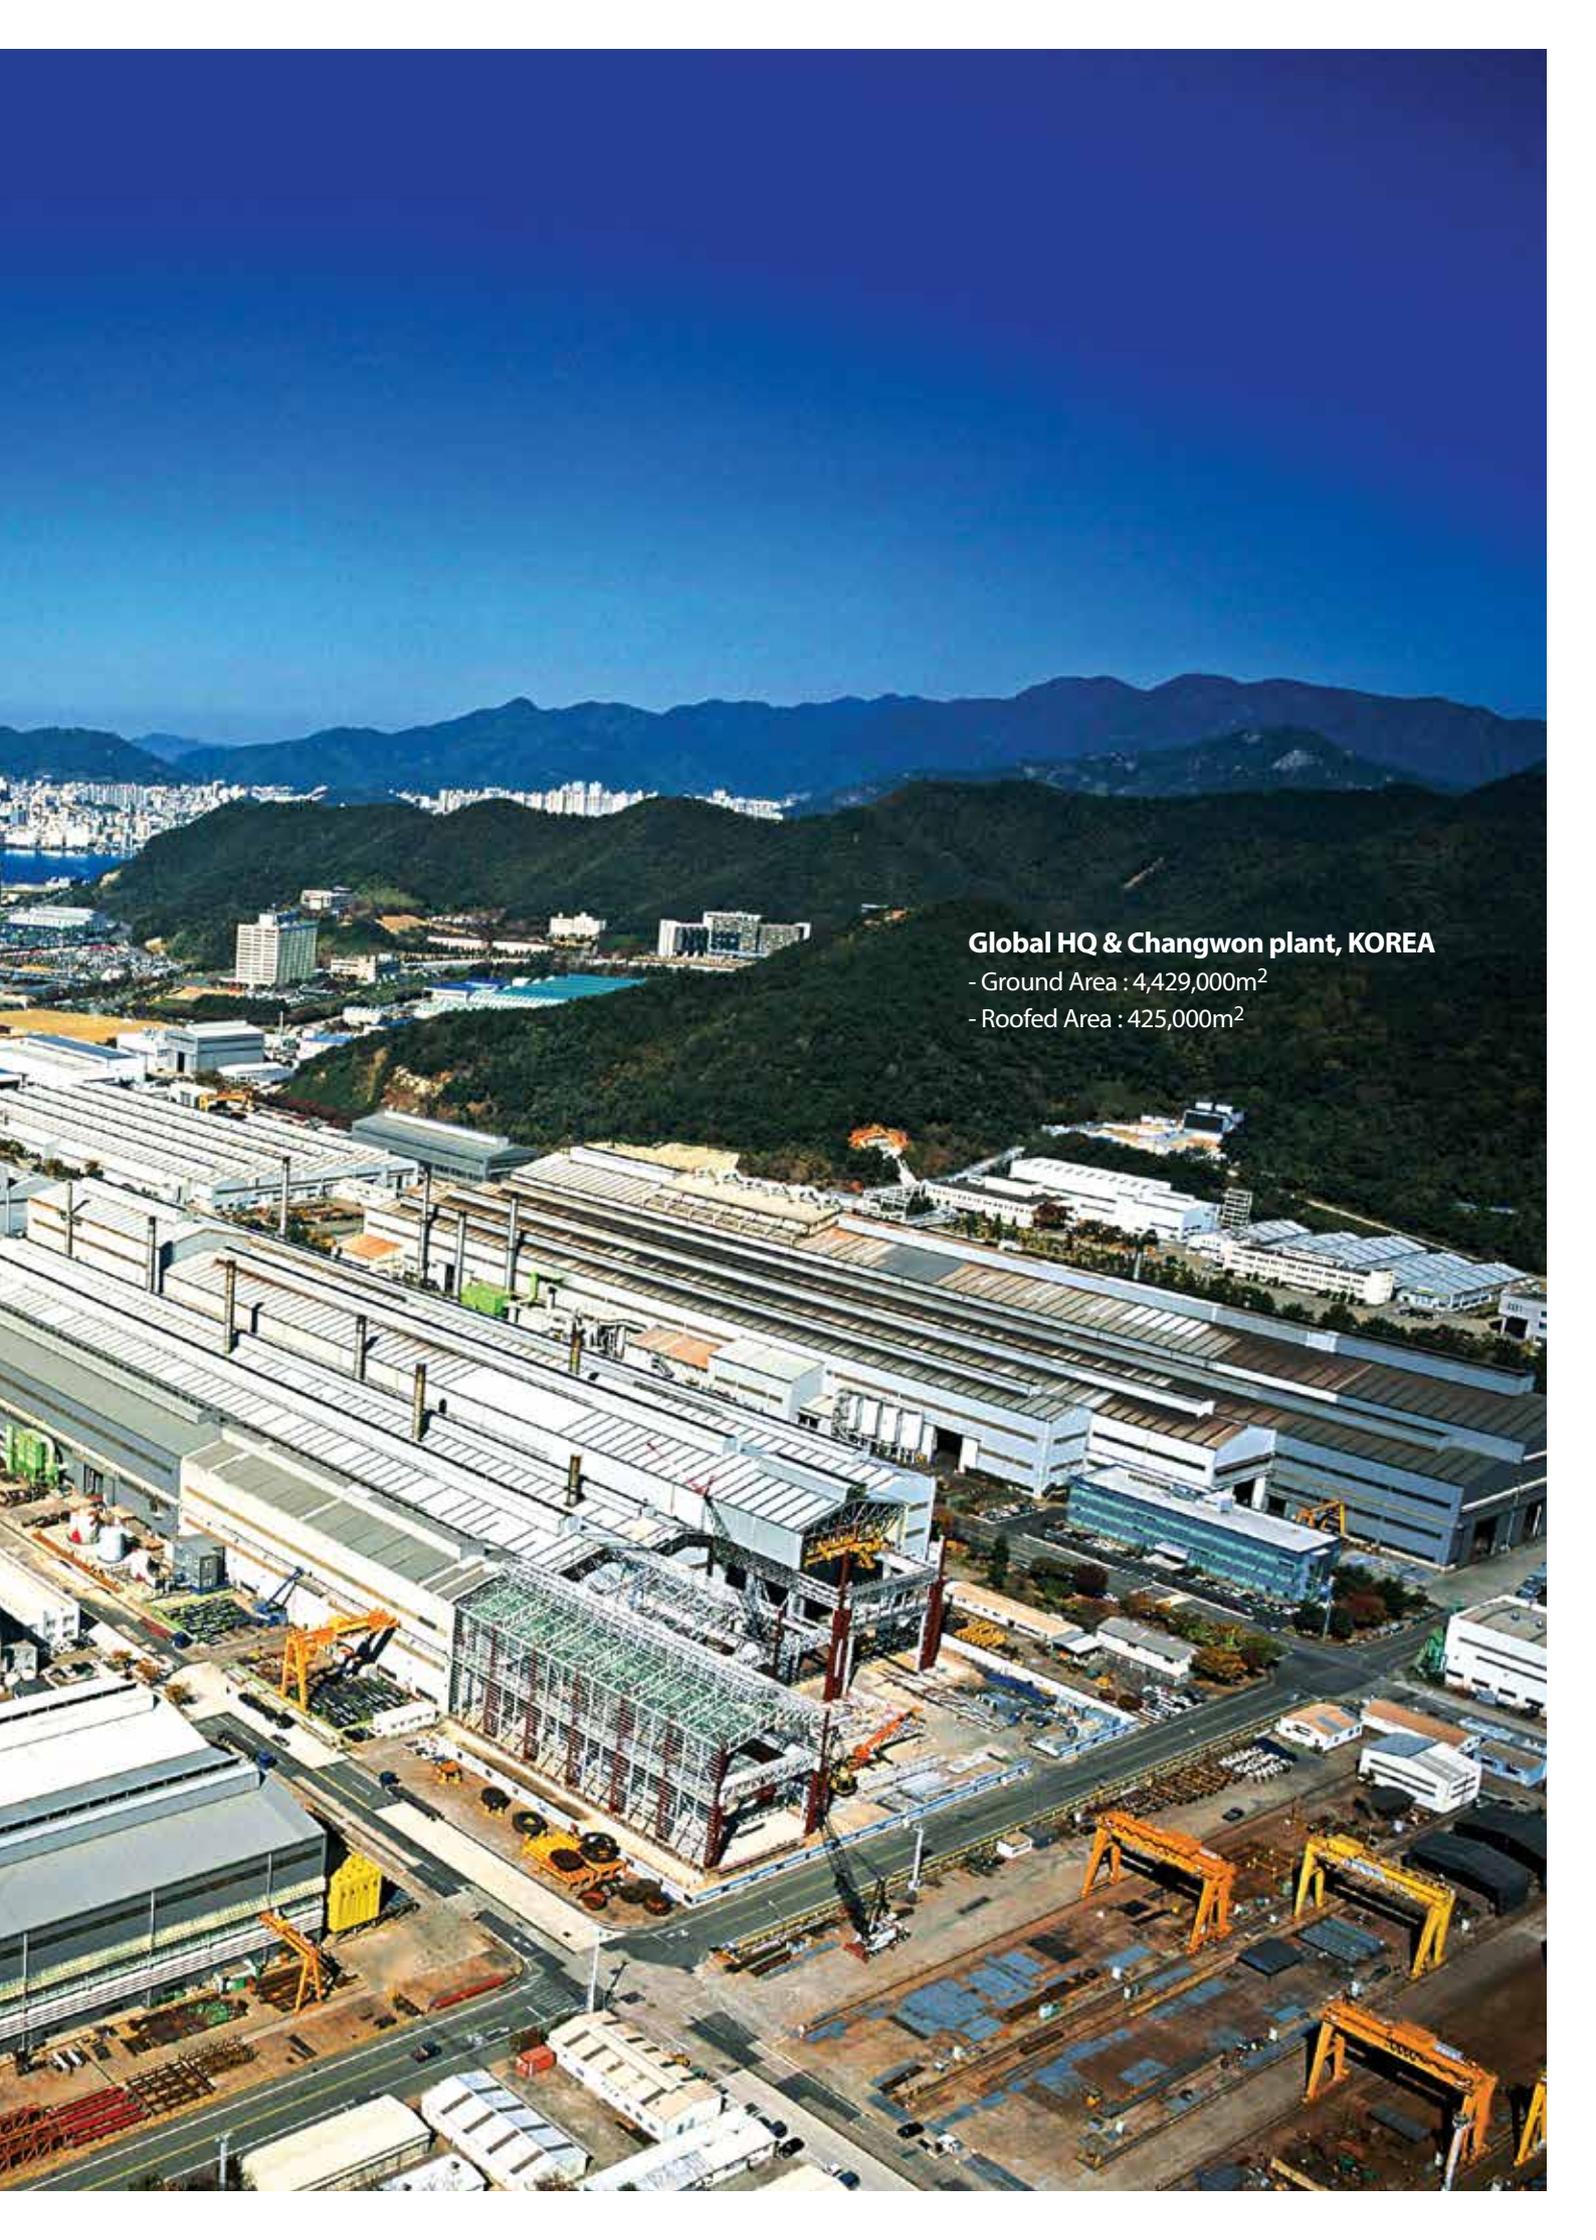

Global HQ & Changwon plant, KOREA


- Ground Area : 4,429,000m²

- Roofed Area : 425,000m²

EXPERIENCES

Doosan is Korea's only company that specializes in NSSS (Nuclear Steam Supply System) for nuclear power plants and possesses the highest level of technology. With its NSSS production lines and management systems for design, material, manufacturing, construction, testing, services, maintenance and repair. Doosan is strengthening its position as a leading provider of NPPs in both domestic and overseas markets. Since Hanbit units 1&2, Doosan has so far supplied equipment to total of 25 domestic nuclear power plants.


Worldwide Experiences

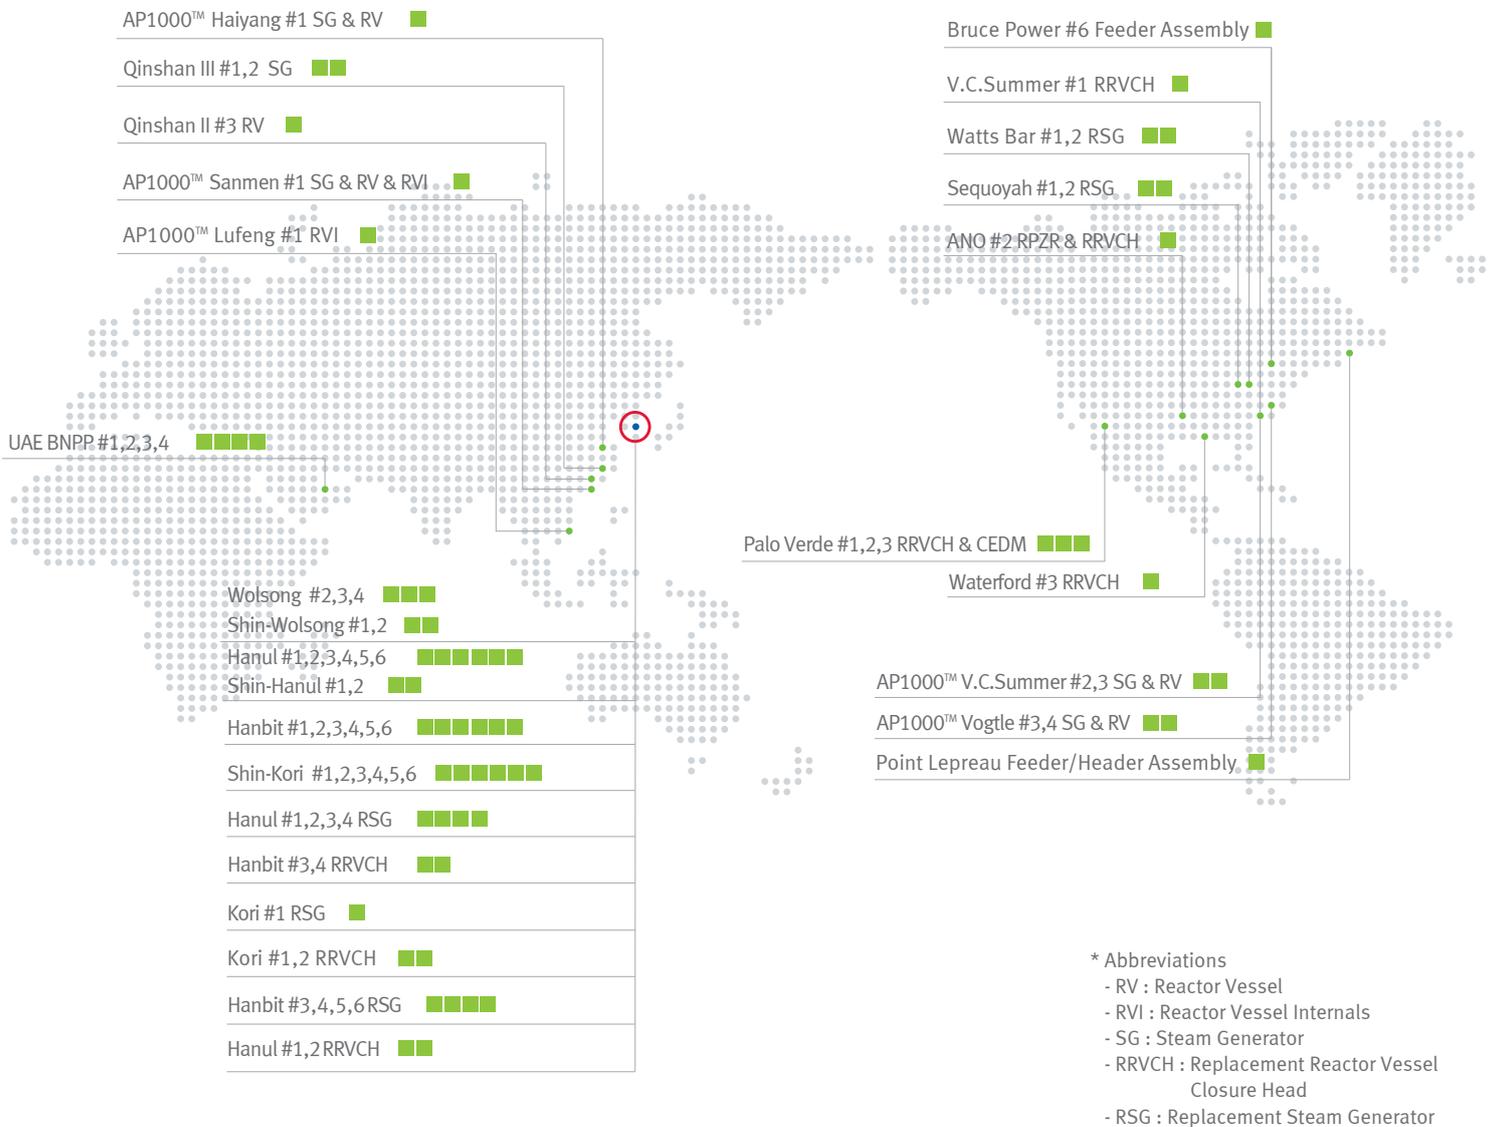

▣ Domestic Experiences



Hanbit Nuclear Power Plants (HBN #1,2,3,4,5,6)

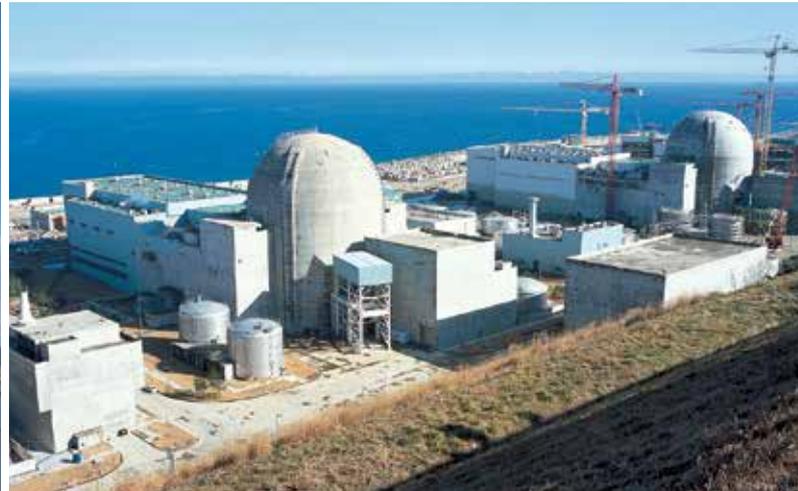

Hanul Nuclear Power Plants (HUN #1,2,3,4,5,6)
Shin-Hanul Nuclear Power Plants (SHN #1,2)



Wolsong Nuclear Power Plants (WSN #2,3,4)
Shin-Wolsong Nuclear Power Plants (SWN #1,2)




Shin-Kori Nuclear Power Plants (SKN #1,2,3,4,5,6)

FEATURES OF APR1400

REACTOR COOLANT SYSTEM

The Reactor Coolant System (RCS) is designed to remove heat from the reactor core. RCS of APR1400 consists of one Reactor Vessel, two Steam Generators, four Reactor Coolant Pumps and one Pressurizer connected to a hot leg. These major components are designed to have a lifetime of 60 years and the seismic design basis of 0.3g SSE is applied to strengthen the resistance to earthquake.

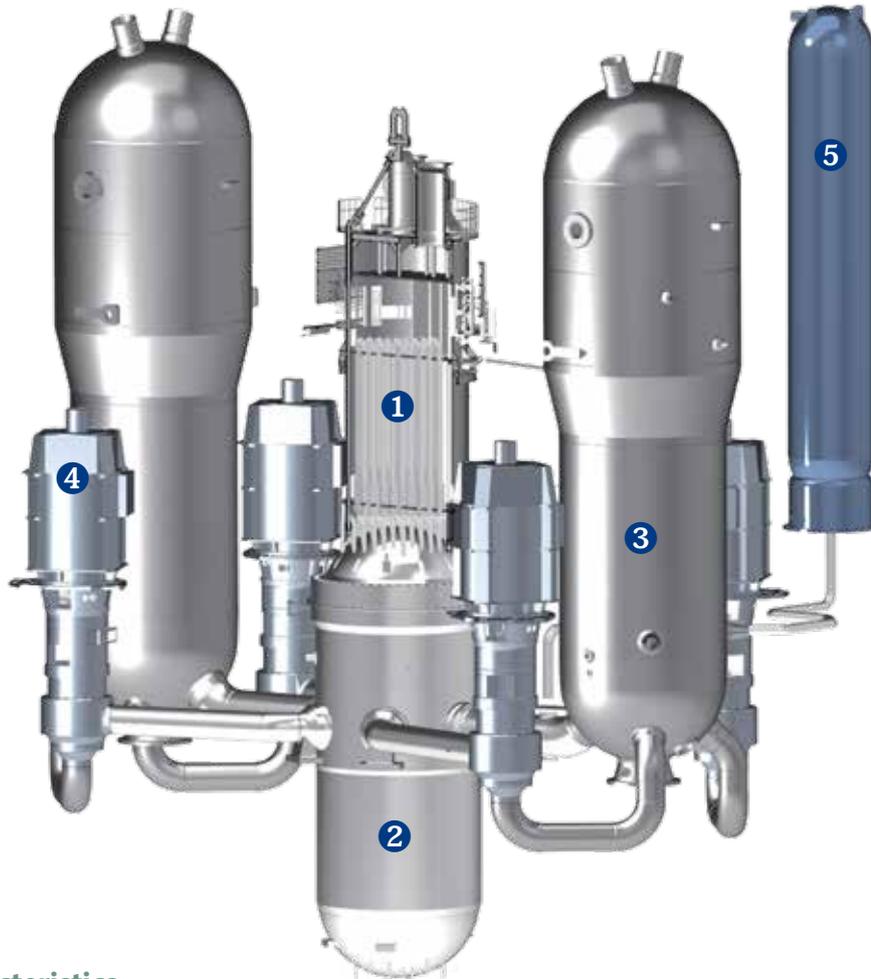

Design Characteristics

Parameters	Design Value
Hot leg diameter (in)	42
Cold leg diameter (in)	30
Operating pressure (psia)	2,250
Reactor inlet temperature (°F)	555
Reactor outlet temperature (°F)	615
Design Pressure (psia)	2,500
Design temperature (°F)	650
Hydrostatic test pressure (psia)	3,125
Total reactor coolant volume (ft ³)	16,020
Total RCS minimum design flow (gal/min)	446,300

- ① Control Element Drive Mechanism
- ② Reactor Vessel
- ③ Steam Generator
- ④ Reactor Coolant Pump
- ⑤ Pressurizer

MANUFACTURING CAPABILITY

As the main contractor for Korea's NSSS (Nuclear Steam Supply System), Doosan maintains the highest level of technology meeting all international standards for manufacturing and quality. Doosan has established its position as a leading supplier of nuclear power components for the international markets and is applying its know-how and experience in a "one-stop" service to cover NSSS production lines of design, raw material, manufacturing, testing, construction and services.

▣ Made in Doosan - From Forging Material to Services



1 Forging



2 Manufacturing



3 Assembly



4 Testing



5 Shipping




6 Installation

FEATURES OF APR1400

REACTOR VESSEL

The Reactor Vessel designed to withstand high pressure and temperature contains nuclear internals and fuel. The Closure Head is removable to reload the fuel, while the Reactor Vessel is fabricated from ring-forged shells. To enhance safety, APR1400 adopts 4 Direct Vessel Injection Nozzles, which inject the coolant water of Safety Injection Tank into the core directly.

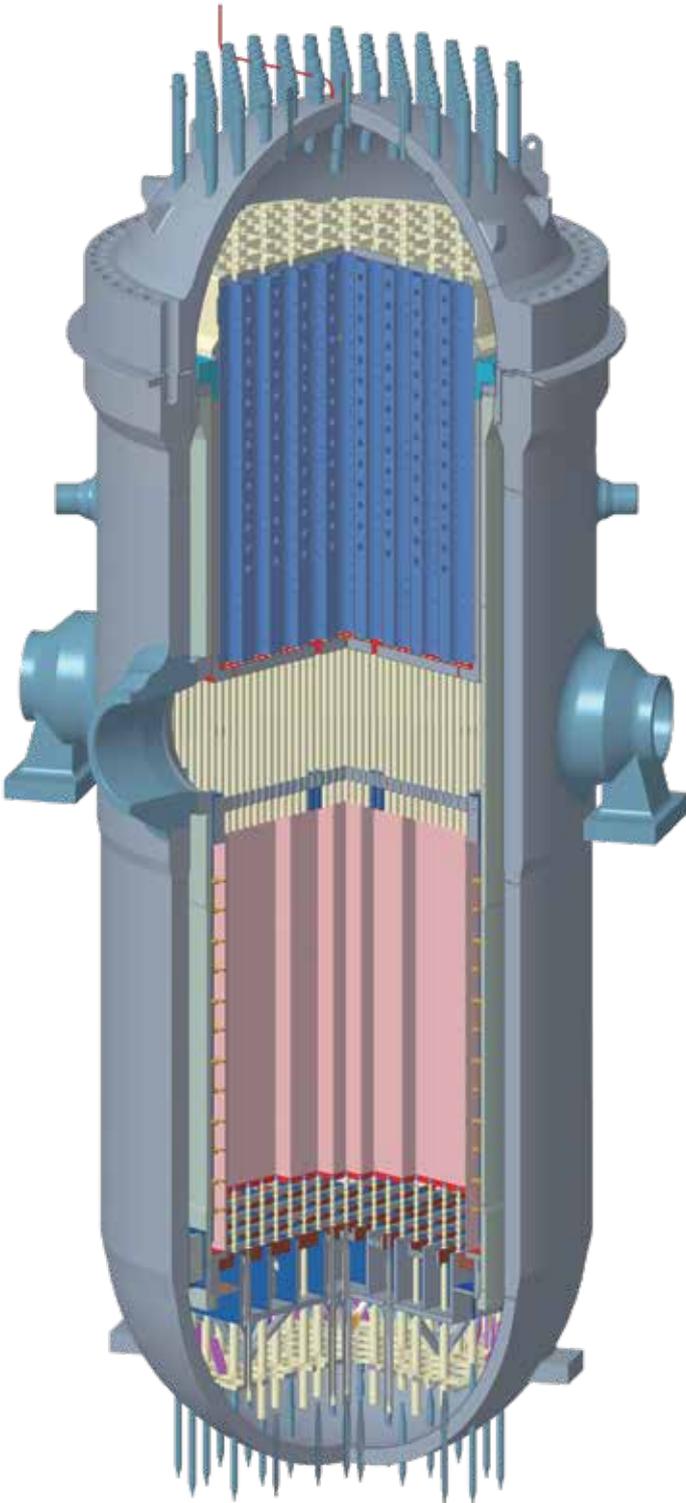

Design Characteristics

Parameters	Design Value
Design pressure (psia)	2,500
Design temperature (°F)	650
Inside diameter at shell (in)	182-1/4
Overall height of vessel and enclosure head (ft-in)	48 7-7/8
Minimum cladding thickness (in)	1/8



Forged Shell Manufacturing

The major part of Reactor Vessel is fabricated from forged material. These ring-forged shells eliminate the need for longitudinal welds thereby reducing production and inspection time. Materials of the Reactor Vessel are carefully selected to withstand high pressure, temperature, and radiation.


Shell & Nozzle, Bottom Head Welding

The Reactor Vessel is composed of shells, nozzles and domes. The shells are first welded together. Then holes are machined to the shell for the assembly of nozzles. Finally, the shell and bottom head dome are welded to form the complete assembly.

Closure Head Assembly

The Reactor Vessel can sustain pressure by tensioning of studs at closure head. At the Closure Head, 108 nozzles are installed for the connection with Control Element Drive Mechanisms. The Closure Head Assembly and the Vessel are sealed by 54 Studs and 2 O-Rings. The Pad & Lug welded over the Closure Head surface are installed for supporting the Integrated Head Assembly.

▣ Various types supplied by Doosan

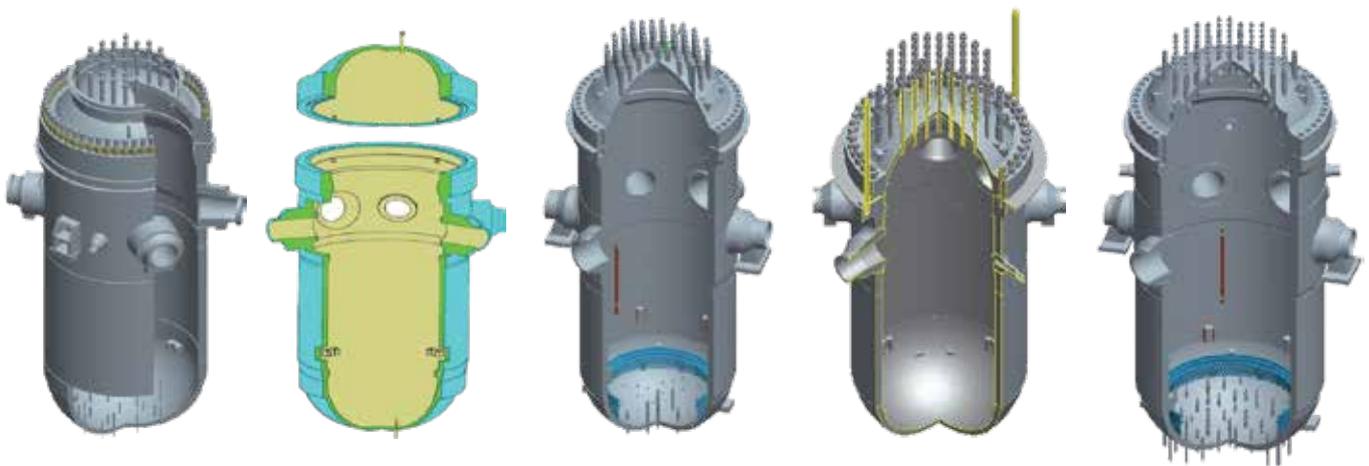

650 MWe
(Qinshan/China)

950 MWe
(Hanul #1,2/Korea)

1,000 MWe
(OPR1000/Korea)

1,000 MWe
(AP1000™/USA, China)

1,400 MWe
(APR1400™/Korea, UAE)

FEATURES OF APR1400

STEAM GENERATOR

The Steam Generator is a type of heat exchanger which provides steam to drive the turbine generator. While heat is exchanged from the Primary Coolant Loop to the Secondary Coolant Loop within the Steam Generator, the coolant within each loop is isolated from the other.



Design Characteristics

Parameters	Design Value
Number of SGs	2
Number of tube per SG	13,102
Tube material	Alloy 690
Heat transfer area (ft ²)	163.67
Tube side operating pressure (psia)	2,250
Shell side maximum operating pressure (psia)	1,100
Steam pressure at full power (psia)	1,000
Steam temperature at full power (°F)	545
Steam flow per SG at full power (lb/hr)	8.975 x 10 ⁶
Maximum moisture at outlet at full power (w/o)	0.25



Material

The Steam Generator is fabricated from ring forged shells and from close die forged heads. These forgings eliminate the need for longitudinal welds thereby reducing production and inspection time. Materials of Steam Generator are carefully selected to withstand high pressure, temperature and radiation.


Tube Sheet Drilling

The tubesheet has drilled holes for Installation of U-bend tube using 3-spindle deep hole drilling machine.

Tube Installation

The U-bend tubes are installed, then carefully expanded to the inner face of tubesheet hole. The expansion process shall be carefully controlled so as to produce as low as residual stress in the tubes as is reasonably achievable.

▣ Various types supplied by Doosan

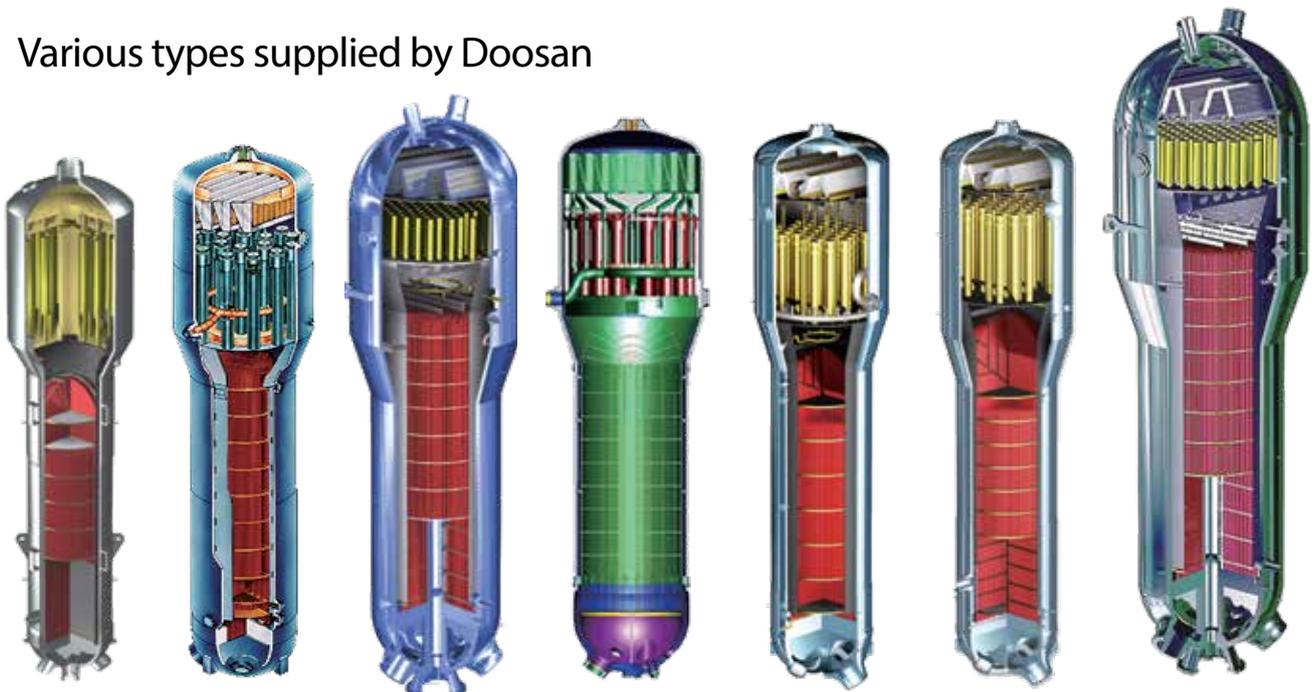

700 MWe
(CANDU
/China)

950 MWe
(Hanul #1,2
RSG/ Korea)

1,000 MWe
(OPR1000
/Korea)

1,000 MWe
(AP1000™
/China,USA)

1,180 MWe
(Sequoyah #1,2
RSG/ USA)


1,183 MWe
(Watts Bar #1,2
RSG/ USA)

1,400 MWe
(APR1400
/Korea, UAE)

FEATURES OF APR1400

REACTOR COOLANT PUMP

The Reactor Coolant Pump (RCP) is single stage centrifugal pump with cantilevered impeller and vertical shaft with hydrodynamic mechanical seals. The RCP located in Reactor Coolant System circulates reactor coolant from two Steam Generators to the Reactor Vessel and back to the Steam Generators.

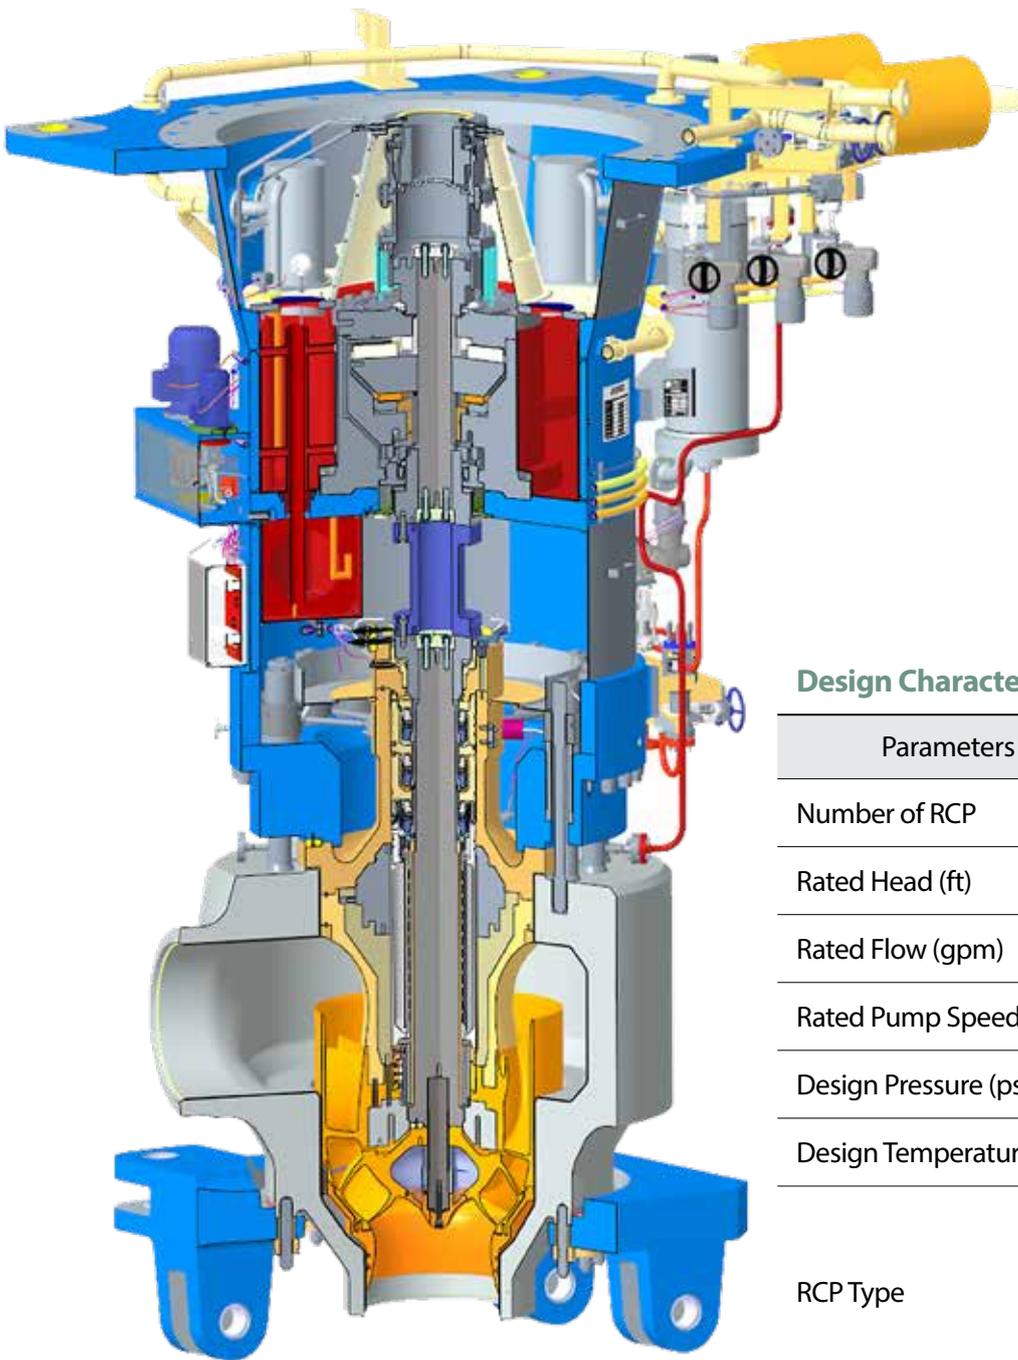

Design Characteristics

Parameters	Design Value
Number of RCP	4
Rated Head (ft)	375
Rated Flow (gpm)	121,600
Rated Pump Speed (rpm)	1,190
Design Pressure (psia)	2,500
Design Temperature (°F)	650
RCP Type	Vertical Single-Stage Centrifugal Pump Bottom Suction & Horizontal Discharge
Brake Horse Power (HP)	13,900



3 Oil Feed Device

- Oil Feed Device is designed to boost circulation of oil in axial & radial bearing by its own blade in the upper bearing housing
- High torque is transferred via special toothed naves and a coupling sleeve.




2 Thrust & Radial Oil Bearing

- Axial bearing is a tilting pad bearing, both main and reverse thrust Jacking oil feed in the main thrust pads.




1 Curved Teeth Coupling

- Designed as flexible coupling, torque is transferred via special toothed naves and a coupling sleeve.





4 Removable Shaft Section

- Removable shaft section is designed to be possible to change upper and lower seals without removing other parts.



5 Stand Still Seal

- In case of seal failure pressure boundary can be closed by stand still sea.

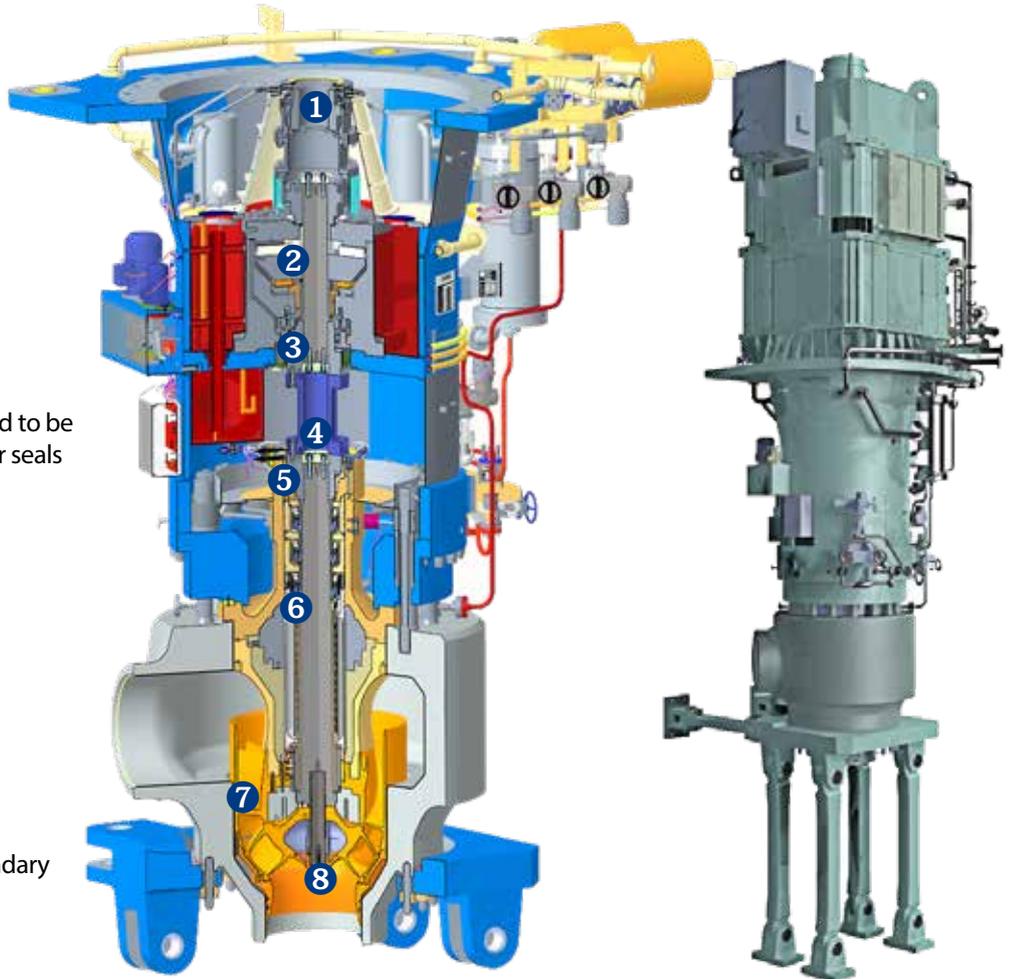


6 3rd Stage Hydrodynamic Seal

- Hydrodynamic effect even at low speed
- No mixed friction at low thermal load
- No thermal deformations due to friction
- Sufficient circulation and cooling.



7 Diffusor

- 11-vane diffusor, other surfaces like water passages between diffusor blades are finished by shot peening.



8 Impeller

- Closed semi- axial impeller, 6-blade
- Back blades are assisting pressure difference for emergency injection water supply.

FEATURES OF APR1400

MAN MACHINE INTERFACE SYSTEM

Man Machine Interface System (MMIS) is equivalent to the brain and nerve system of a nuclear power plant. It monitors and controls the operating conditions to prevent accidents proactively.

Doosan achieved a complete development of MMIS which is core part of nuclear technology that was relied on overseas companies in the past by an accomplishment of R&D in cooperation with domestic utility, KHNP and research institutions. Doosan will make the highest quality of service for the clients as total provider of the world nuclear power plant equipment who produces safe and reliable nuclear I&C system based on global-top technology.



Features




ESF-CCS



P-CCS

System	Technical Features
PPS	Coincidence processor structure (3 Rack with 3 Processor Module)
RCOPS	Improvement of CEA signal checking algorithm to avoid CEA position latching problem
ESF-CCS	Maintenance Feature : MTP/ITP in each safety system
QIAS-P	Application of redundant communication module and path
QIAS-N	Application of separated network with IPS
IPS/CPS	IPS Server and Network configuration based on DCS
PCS NPCS/DPS	Redundant power controller DC Hold Power automatic commitment
NIMS	High performance industrial computer included PCI type data acquisition device
MCR/LDP	Nuclear Steam Supply System & Balance of Plant integrated Control Design

Architecture of DOOSAN MMIS for APR1400

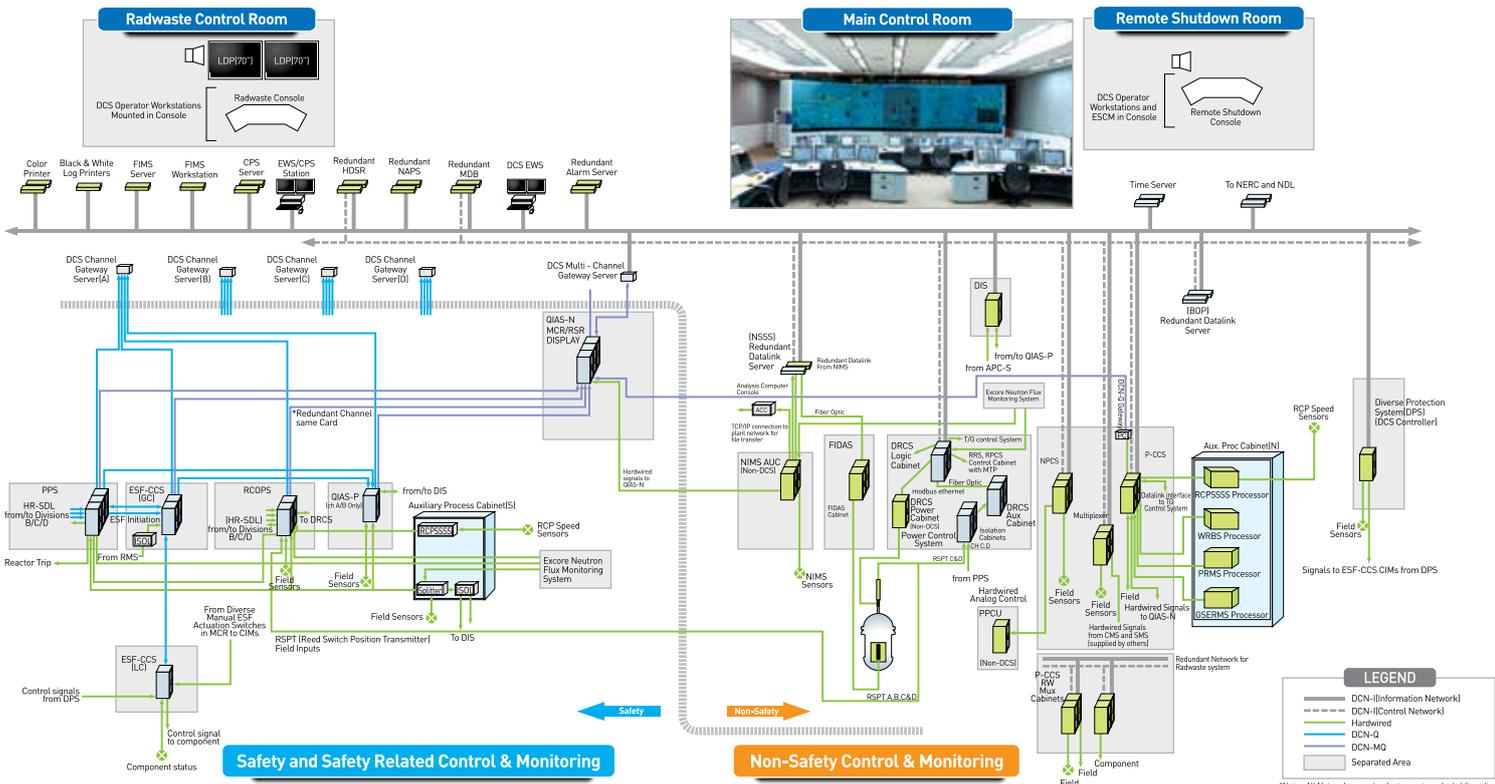

CPS : Computerized Procedure System
DCS : Distributed Control System
DIS : Diverse Indication System
DRCS : Digital Rod Control System

ESF-CCS : Engineered Safety Features-Component Control System
EWS : Engineering Workstation
FIDAS : Fixed In-Core Detector Amplifier System
FIMS : Field Instrument Management System

HDSR : Historical Data Storage and Retrieval
MCR : Main Control Room
MDB : Main Data Base
NDL : Nuclear Data Link

NAPS : Nuclear Application Programs
NIMS : NSSS Integrity Monitoring System
NPCS : NSSS Process Control System
NSSS : Nuclear Steam Supply System

PCCS : Process Component Control System
PPS : Plant Protection System
QIAS-P : Qualified Indication and Alarm System - PAMI
QIAS-N : Qualified Indication and Alarm System - Non Safety

RSR : Remote Shutdown Room
RCOPS : Reactor COre Protection System
RCPSSSS : RCP Shaft Speed Sensing System



CRCS



MG-SET

Other Products

- Control Rod Control System (CRCS)
- Control Element Drive Mechanism Control System (CEDMCS)
- Main Control Room (MCR)
- Fuel Handling Equipment (FHE)
- Vital Bus Power Supply System (VBPSS)
- Motor Generator Set (MG-SET)
- Reactor Trip Switchgear System (RTSS)
- Gas Stripper & Boric Acid Concentrator Instrumentation and Control (GS- BAC I&C)

PRESSURIZED HEAVY WATER REACTOR

Doosan also supplied the major components of the PHWR (Pressurized Heavy Water Reactor) plants at Wolsong units 2,3 & 4 and Qinshan CANDU units 1 & 2 in China. PHWR uses natural uranium which is simpler to handle and easier to process into fuel assemblies than enriched uranium.



Steam Generator (PWHR)

Four Steam Generators are installed in the RCS (Reactor Coolant System) of PHWR plant.




Feeder Header Assembly

The Feeder consists of several hundred pipes which transmit heated heavy water from Calandria to Steam Generator. The Header merges and distributes the coolant.

CASK

Doosan is one of the best Cask Manufacturing Companies in the world, especially. Doosan entered into Cask business in 1990 and delivered 2 sets of Cask for Kori nuclear power plant in 2002 and 1 set of Cask for Hanbit Nuclear Power Plant unit 2 and 2 sets of Cask for Hanul Nuclear Power Plant units 1 & 2 in 2007. In 2014, 12 sets of Cask were supplied for Japanese client. In 2017, the optimized Cask model in Korea, Doosan DSS-21 system has been developed in cooperation with NAC International, and the various Cask models of Doosan being developed continuously.

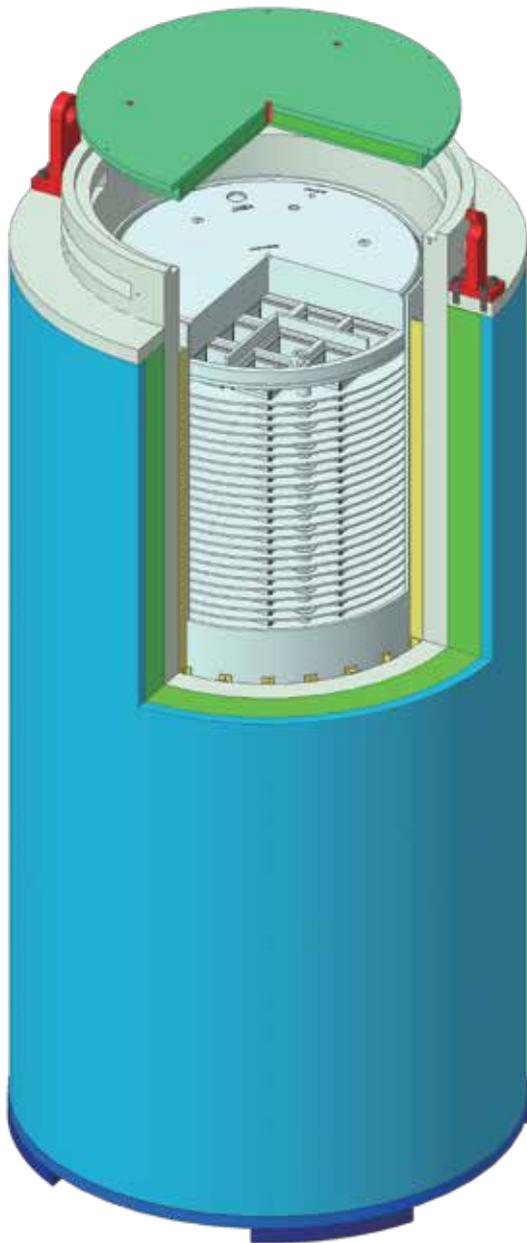

DOOSAN DSS-21 System
[MSO-21]

Experience List				
Project Name	User	Model Name	Capacity	Quantity
KSC-4	KHNP	KSC-4	PWR SF 4 Assembly	1 Set
Kori Cask	KHNP	CASTOR KN-12	PWR SF 12 Assembly	2 Set
HBN/HUN Cask	KHNP	CASTOR KN-12	PWR SF 12 Assembly	3 Set
TEPCO Cask	TEPCO	NEO-69	BWR SF 69 Assembly	12 Set

MSO-24



MSO-37



DPC-24



Metal Storage Overpack
[Dry Storage System]

Transport & Storage Cask
[Dual Purpose]



NUCLEAR SERVICES

Doosan strives to provide the best technical services and solutions to operate nuclear power plants with its engineering capabilities and manufacturing experiences.



Maintenance

Doosan provides a full range of maintenance services for operating plants from start-up to outage maintenance to retain its capability for improvement, efficiency, and reliability.

- Start-up maintenance : Hanul units 5&6 and Shin-Hanul units 1&2
- Preventive maintenance : Alloy600 mitigation applying up-to-date technology, such as half-nozzle repair, overlay welding, and peening.
- Outage maintenance : Reactor Coolant Pump internal parts, including chemical decontamination and Refueling system

Manufacture of Replacement equipment

Replacement equipment for all domestic and numerous overseas projects have been supplied by Doosan.

- Domestic : 20 RSGs & 6 RRVCHs
- Overseas : 16 RSGs & 6 RRVCHs

Installation of Replacement equipment

SG & RVCH Replacement for domestic nuclear power plant has been successfully performed by Doosan.

- Hanul units 3&4 SG Replacement
- Kori unit 1 RVCH Replacement
- Hanul units 1&2 RVCH Replacement


* Abbreviations

- (R)RVCH : (Replacement) Reactor Vessel Closure Head
- (R)SG : (Replacement) Steam Generator

Repair

Doosan has various facilities and extensive field experiences for Reactor Vessel (RV), Steam Generator (SG), Pressurizer (PZR) & Reactor Coolant Loop (RCL) repair.

- RV : Overlay & Seal Weld Repair of Control Element Drive Mechanism Nozzles & Vent Nozzle, In-Core Instrumentation Nozzle Repair, RV Stud Hole Inspection & Repair
- SG : Tube Plugging, Repair of Divider Plate & Nozzles, Cleaning of Tube Inside (CANDU type)
- PZR : Heater Replacement, Overlay of Dissimilar Metal Welds
- RCL : Thermal/Sleeve Removal in Safety Injection Nozzle, Repair of Resistance Temperature Detector Nozzle

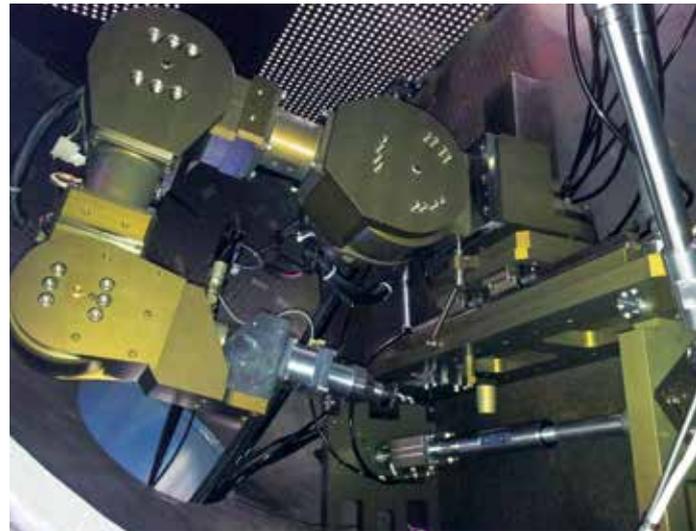

Non Destructive Examination

Doosan retains 10 EPRI Performance Demonstrations and a numerous skilled staffs with NDE expert qualification and conducts Non Destructive Evaluation Inspection on operating Nuclear power plant and Pre service inspection.

- RVCH Penetration Nozzle and Vent Pipe Inspection
- ICI(BMI) Nozzle & Weld Inspection
- Reactor Coolant System Pump Shaft Inspection
- Pressure Vessel Weld Auto and Manual Ultrasonic test
- Steam Generator Tube Eddy current test



Others

Supplying Spare Parts

- Pressurizer Heater, Reactor Vessel Studs & Nuts, etc.

Upgrade and Modification

- Fuel Handling System, Integrated Head Assembly, High Density Fuel Rack, etc

Technical Advisory Service

- Installation
- Startup test

* Abbreviations

- EPRI : Electric Power Research Institute
- CANDU : Canadian Deuterium Uranium Reactor



GLOBAL NETWORK

EUROPE

Subsidiaries

DOOSAN POWER SYSTEMS LTD.

Doosan House, Crawley Business Quarter, Manor Royal, Crawley, West Sussex, RH10 9AD, United Kingdom
Tel 44-1293-612888
Fax 44-1293-584321

DOOSAN BABCOCK

Porterfield Road, Renfrew, PA4 8DJ, United Kingdom
Tel 44-141-886-4141
Fax 44-141-885-3338

DOOSAN SKODA POWER

Tylova 1/57, 301 28 Plzen, Czech
Tel 420-378-185-000
Fax 420-378-185-910

DOOSAN LENTJES

Daniel-Goldbach-Strasse, 19, 40880 Ratingen, Germany
Tel 49-2102-166-0
Fax 49-2102-166-2500

DOOSAN ENPURE

Doosan Enpure House, Parklands Business Park, Rubery, Birmingham, B45 9PZ, United Kingdom
Tel 44-121-683-2801
Fax 44-121-251-9111

DOOSAN IMGB

104 Berceni Road, Bucharest 4, Romania
Tel 40-21-301-2500
Fax 40-21-301-2501

Branches

FRANKFURT OFFICE

7th Floor, Arabella Center, Lyoner Strasse 44-48, 60528 Frankfurt am Main, Germany
Tel 49-69-69-5004-0
Fax 49-69-69-5004-10

BIRMINGHAM WATER R&D CENTER

Doosan Enpure House, Parklands Business Park, Rubery, Birmingham, B45 9PZ, United Kingdom
Tel 44-121-683-2800
Fax 44-121-683-2888

ASIA

Subsidiaries

DOOSAN POWER SYSTEMS INDIA PVT. LTD.

[CHENNAI OFFICE]

18/2A, Senneerkuppam, Bypass Road, Poonamallee, Chennai 600 056, Tamil Nadu, India
Tel 91-44-3303-5000
Fax 91-44-3303-5001

[NEW DELHI OFFICE]

16th Floor, DLF Square Building, Jacaranda Marg, Near NH-8, DLF Phase-II, Gurgaon, Haryana 122 002, India
Tel 91-124-439-8200
Fax 91-124-414-7006

[KOLKATA OFFICE]

South City Pinnacle, Mangalam Business Center Suite No - 1214, 12th Floor, Salt Lake, Sector - V, Kolkata - 700091
T- 91-33-4019-3425
F- 91-33-4019-3430

DOOSAN HEAVY INDUSTRIES VIETNAM CO., LTD. (DOOSAN VINA)

Dung Quat Economic Zone, Binh Thuan Commune Binh Son District, Quangngai Province, Vietnam
Tel 84-55-3618-900
Fax 84-55-713-950

DOOSAN HEAVY INDUSTRIES JAPAN CORP.

4F, Sanno Park Tower, 2-11-1, Nagatacho, Chiyoda-ku, Tokyo, Japan 100-6104
Tel 81-3-5510-5460
Fax 81-3-5510-5461

Branches

BEIJING OFFICE

19th Floor, Gateway Plaza, Tower B, No. 18 Xiaguangli, North Road, East Third Ring Chaoyang District, Beijing 100027, China
Tel 86-10-8454-7122, 7136
Fax 86-10-8484-7139

BANGKOK OFFICE

10th Floor, M-Thai Tower, All Seasons Place, 87 Wireless Road Phatumwan, Bangkok 10330, Thailand
Tel 66-2-654-0690
Fax 66-2-654-0693

HANOI OFFICE

#1101, Daeha Business Center, 360 Kim Ma, Ba Dinh District Hanoi, Vietnam
Tel 84-4-6273-0545-9
Fax 84-4-6273-0550

JAKARTA OFFICE

Menara Sentraya 17th Floor, Unit B2, Jalan Iskandarsyah Raya No. 1A, Kebayoran Baru, Jakarta Indonesia
Tel 62-21-2788-1802
Fax 62-21-2788-1803

MANILA OFFICE

Unit 1802, One World Place, 32nd street, Bonifacio Global City, Taguig City 1634, Philippines
Tel 63-2-801-4619
Fax. 63-2-801-4616

SHANGHAI OFFICE

Rm2903A, Gubei International Fortune Center, No.1438, Hong Qiao Road, Chang Ning District, Shanghai, 201103, China
Tel 86-21-5877-8696
Fax 86-21-5877-5938

TAIPEI OFFICE

8F-7, No.495, Guangfu S. Rd., Taipei, Taiwan
Tel 63-2-949-8060

AMERICAS

Subsidiaries

DOOSAN HEAVY INDUSTRIES AMERICA CORP.

10th Floor, Parker Plaza, 400 Kelby Street, Fort Lee, NJ 07024, USA
Tel 1-201-944-4554 31, 24
Fax 1-201-944-5022

DOOSAN ATS AMERICA, LLC

11360 N. Jog Road, Palm Beach Gardens, FL 33418, USA
Tel 1-561-572 9100
Fax 1 561 572 9101

Doosan GridTech

71 Columbia St, Suite 300, Seattle, WA 98104, USA
Tel 1-888-452-7715

Doosan HF Controls

1624 West Crosby Road, Suite 124 Carrollton, Texas 75006, USA
Tel 1-469-568-6526

Doosan Power Services America

1050 Crown Pointe PKWY, STE-1200, Atlanta, GA-30338, USA
Tel 1-770-861-9400

Doosan Turbomachinery Services

12000 N. P Street, La Porte, TX 77571, USA
Tel 1-713-364-7500

Branches

NEWINGTON OFFICE

178 Shattuck Way, Newington, NH 03801, USA
Tel 1-603-433-5507
Fax 1-603-433-1060

PITTSBURGH OFFICE

c/o Westinghouse Electric Company 1000 Westinghouse Drive, Building 1, 256A, Cranberry Township, PA, 16066, USA
Tel 1-412-374-6071

SANTIAGO OFFICE

Av. Nueva Tajamar 481, Torre Sur, Piso 11, Oficina 1103, Las Condes, Santiago, Chile
Tel 56-2-2657-3333
Fax 56-2-2657-3343

MIDDLE EAST & AFRICA

Subsidiary

Doosan Power Systems Arabia

Al Hamra Plaza, Unit no. 12, 1st floor, Palestine Road, Jeddah 23212-7663, Kingdom of Saudi Arabia
Tel 966-012-610-3600

Branches

ABU DHABI OFFICE

508, Al Ghaith Tower, Hamdan Street, P.O. Box 27767, Abu Dhabi, UAE
Tel 971-2-627-6273
Fax 971-2-627-6274

CAIRO OFFICE

2nd Floor, Land Mark Building 1, 67 El Teseen St., 5th Settlement, New Cairo
Tel 20-2-2537-1040
Fax 20-2-2537-1041

DUBAI OFFICE

Office Unit No. 2202/2203, 22nd Floor Uborra Tower, Al Abraj Street, Business Bay P.O. Box 282131, Dubai, U.A.E.
Tel 971-4-327-5545
Fax 971-4-327-5529

DAMMAM WATER R&D CENTER

Al Turki Business Park 9th Floor, Al Khobar 31952, Eastern Province, Kingdom of Saudi Arabia
Tel 966-3-868-6951
Fax 966-3-868-7100

KUWAIT OFFICE

PO Box 2031 Laila Commercial Tower, Floor 7B, Block No.4, Plot No. 35, Salmiya, Kuwait
Tel 965-2575-3126
Fax 965-2575-2001

MIDDLE EAST OPERATIONS CENTER

Office Unit No. 2202/2203, 22nd Floor Uborra Tower, Al Abraj Street, Business Bay P.O. Box 282131, Dubai, U.A.E.
Tel 971-4-327-5545
Fax 971-4-327-5529

RIYADH OFFICE

205-206, The Plaza Building (Akariya No. 4), Olaya Street, P.O.Box 9656, Riyadh 11423, Kingdom of Saudi Arabia
Tel 966-11-419-1696
Fax 966-11-419-1995

AFRICA

Branches

JOHANNESBURG OFFICE

12F, The Forum, 2 Maude Street, Sandton, Johannesburg, South Africa
Tel 27-113-265-790
Fax 966-1-419-1995



Doosan Heavy Industries & Construction

SEOUL OFFICE

465 Gangnam-daero, Seocho-Gu, Seoul 06611 Korea
Tel. 82-2-513-6114 Fax. 82-2-513-6200

www.doosanheavy.com

HEAD OFFICE AND CHANGWON PLANT

22 DoosanVolvo-ro, Seongsan-Gu Changwon, Gyeongnam 51711 Korea
Tel. 82-55-278-6114, 7114 Fax. 82-55-264-5551,5552